



PATENT ABSTRACTS OF JAPAN

(11) Publication number :

06-284615

(43) Date of publication of application : 07.10.1994

RECEIVED
JUN 27 2002
TC 2800 MAIL ROOM

51) Int. Cl.

H02K 3/28

H02K 19/22

21) Application number : 05-074417

(71) Applicant : NIPPONDENSO CO LTD

22) Date of filing : 31.03.1993


(72) Inventor : SHICHIJIYOU AKICHIKA

54) ELECTRIC ROTATING MACHINE

57) Abstract:

URPOSE: To provide an electric rotating machine in which electromagnetic noise is reduced without complicating the winding work for the stator core.

ONSTITUTION: A stator core to be applied with a stator coil 9 as an inner periphery provided with 36 slots for containing the stator coil 9 wherein the number of slots per pole per phase is set at 1. The stator coil 9 comprises a first winding circuit 9a comprising three first windings Y1, Y2, Y3 connected in star, and a second winding circuit 9b comprising three second windings $\Delta 1$, $\Delta 2$, $\Delta 3$ connected in delta and connected in parallel with the first winding circuit 9a. The first winding circuit 9a employs full-pitch winding having coil side interval of electric angle π , whereas the second winding circuit 9b employs fractional pitch winding having coil side interval of electric angle $2\pi/3$.

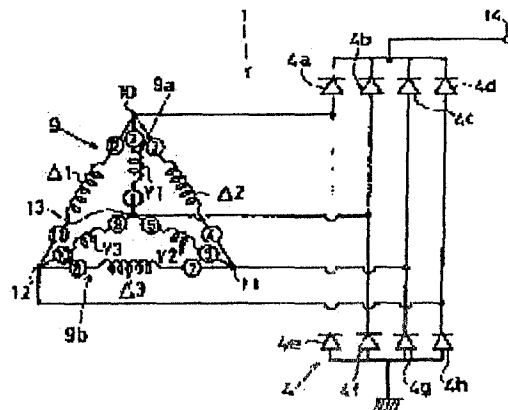

LEGAL STATUS

[Date of request for examination]

11.11.1999

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of rejection]

ate of requesting appeal against examiner's
cision of rejection]
ate of extinction of right]

Copyright (C); 1998, 2000 Japan Patent Office


between Rota 2 and the stator 3 as a result -- there is nothing -- electromagnetism -- an ambient noise [-like] can be reduced moreover -- above -- electromagnetism -- since the number of slots of ***** can be set to 1 by combining 1st coil circuit 9b by which the short pitch winding was carried out to 1st coil circuit 9a by which the full pitch winding was carried out when decreasing an ambient noise [-like], the coil work to a stator core 8 does not become complicated like before (the number of slots of ***** is 2)

010] By having connected 2nd coil circuit 9b by which connection was carried out to 1st coil circuit 9a by which connection was carried out to Y form, and delta form in this example so that the vector diagram synthesis summit might be in agreement, as shown in drawing 1 the [the 1st terminal 10 of 1st coil circuit 9a and 2nd coil circuit 9b, the 2nd terminal 11, the 3rd edge, and] -- the neutral point 13 of 1 coil circuit 9a is connectable with the single three phase rectifier circuit 4 the [moreover,] -- the exciter output current can be freely taken out from the neutral point 13 of 1st coil circuit 9a Furthermore, when 2nd coil circuit 9b made the coil side spacing the short pitch winding of electrical angles $2\pi/3$, third-harmonic-wave magnetomotive force of 2nd coil circuit 9b can be set to 0. It can follow, the third-harmonic-wave circulating current generated in delta form connection circuit by carrying out connection of the 2nd coil circuit 9b to delta form can be lost, and the temperature rise by this circulating current can be stopped.


011]


[effect of the invention] the rotation electrical machinery of this invention -- the number of slots of ***** -- ** -- without coil work becomes complicated by having wound the 1st coil circuit by the full pitch winding, and having wound the 2nd coil circuit to the stator core to carry out at intervals of the coil side of electrical angles $2\pi/3$ -- electromagnetism -- an ambient noise [-like] can be reduced


[translation done.]

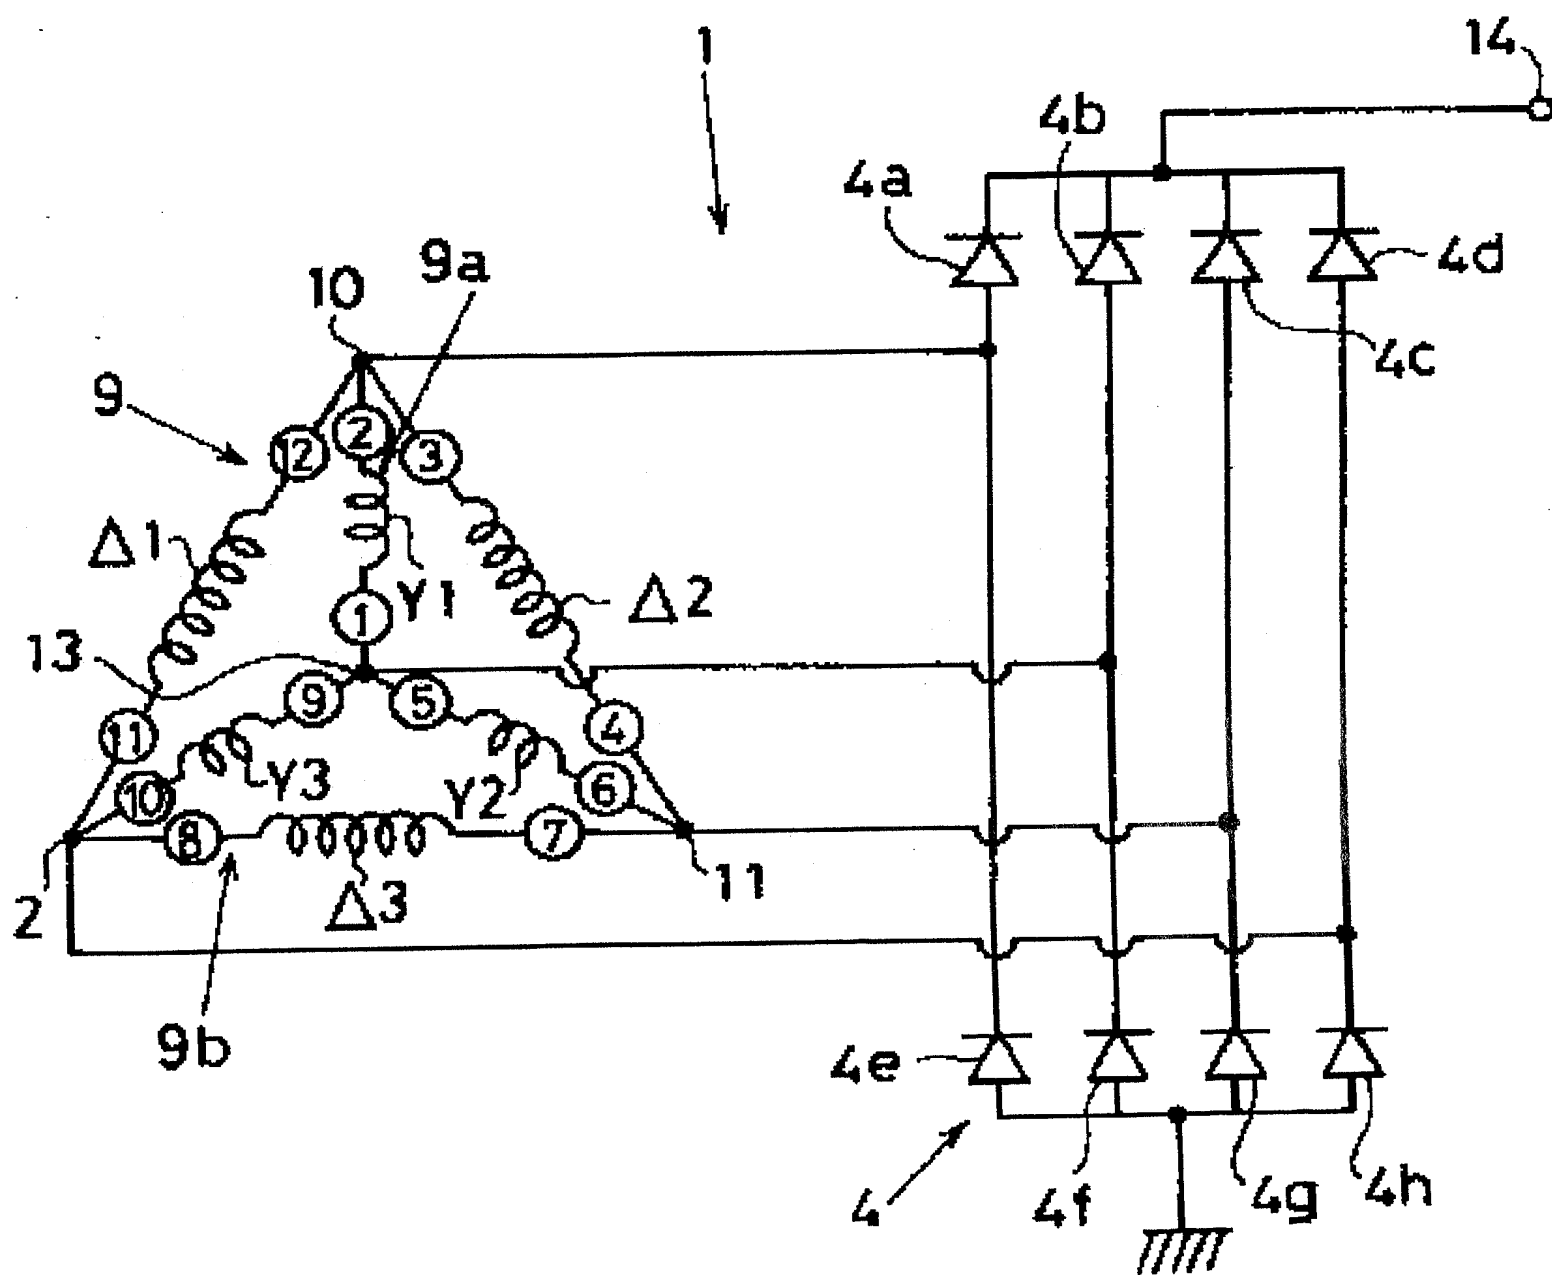



ロータ回転方向

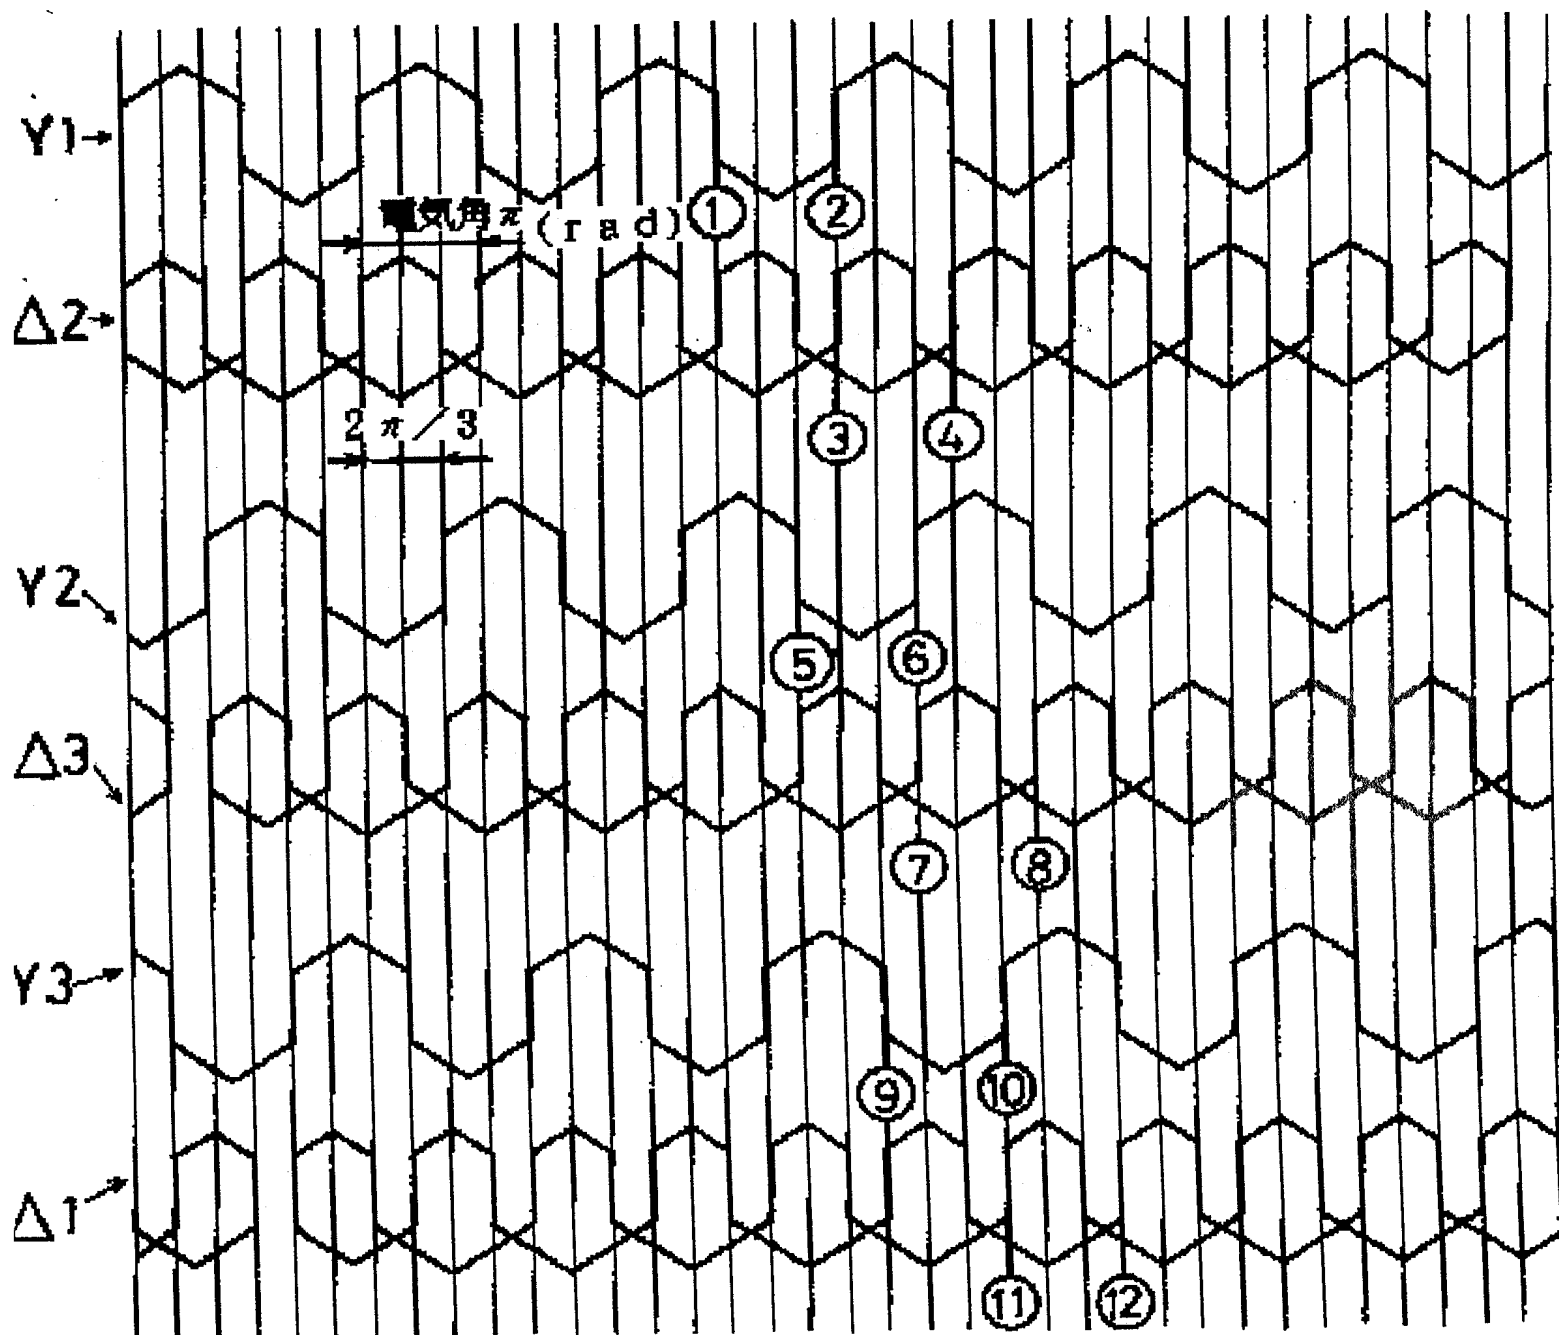

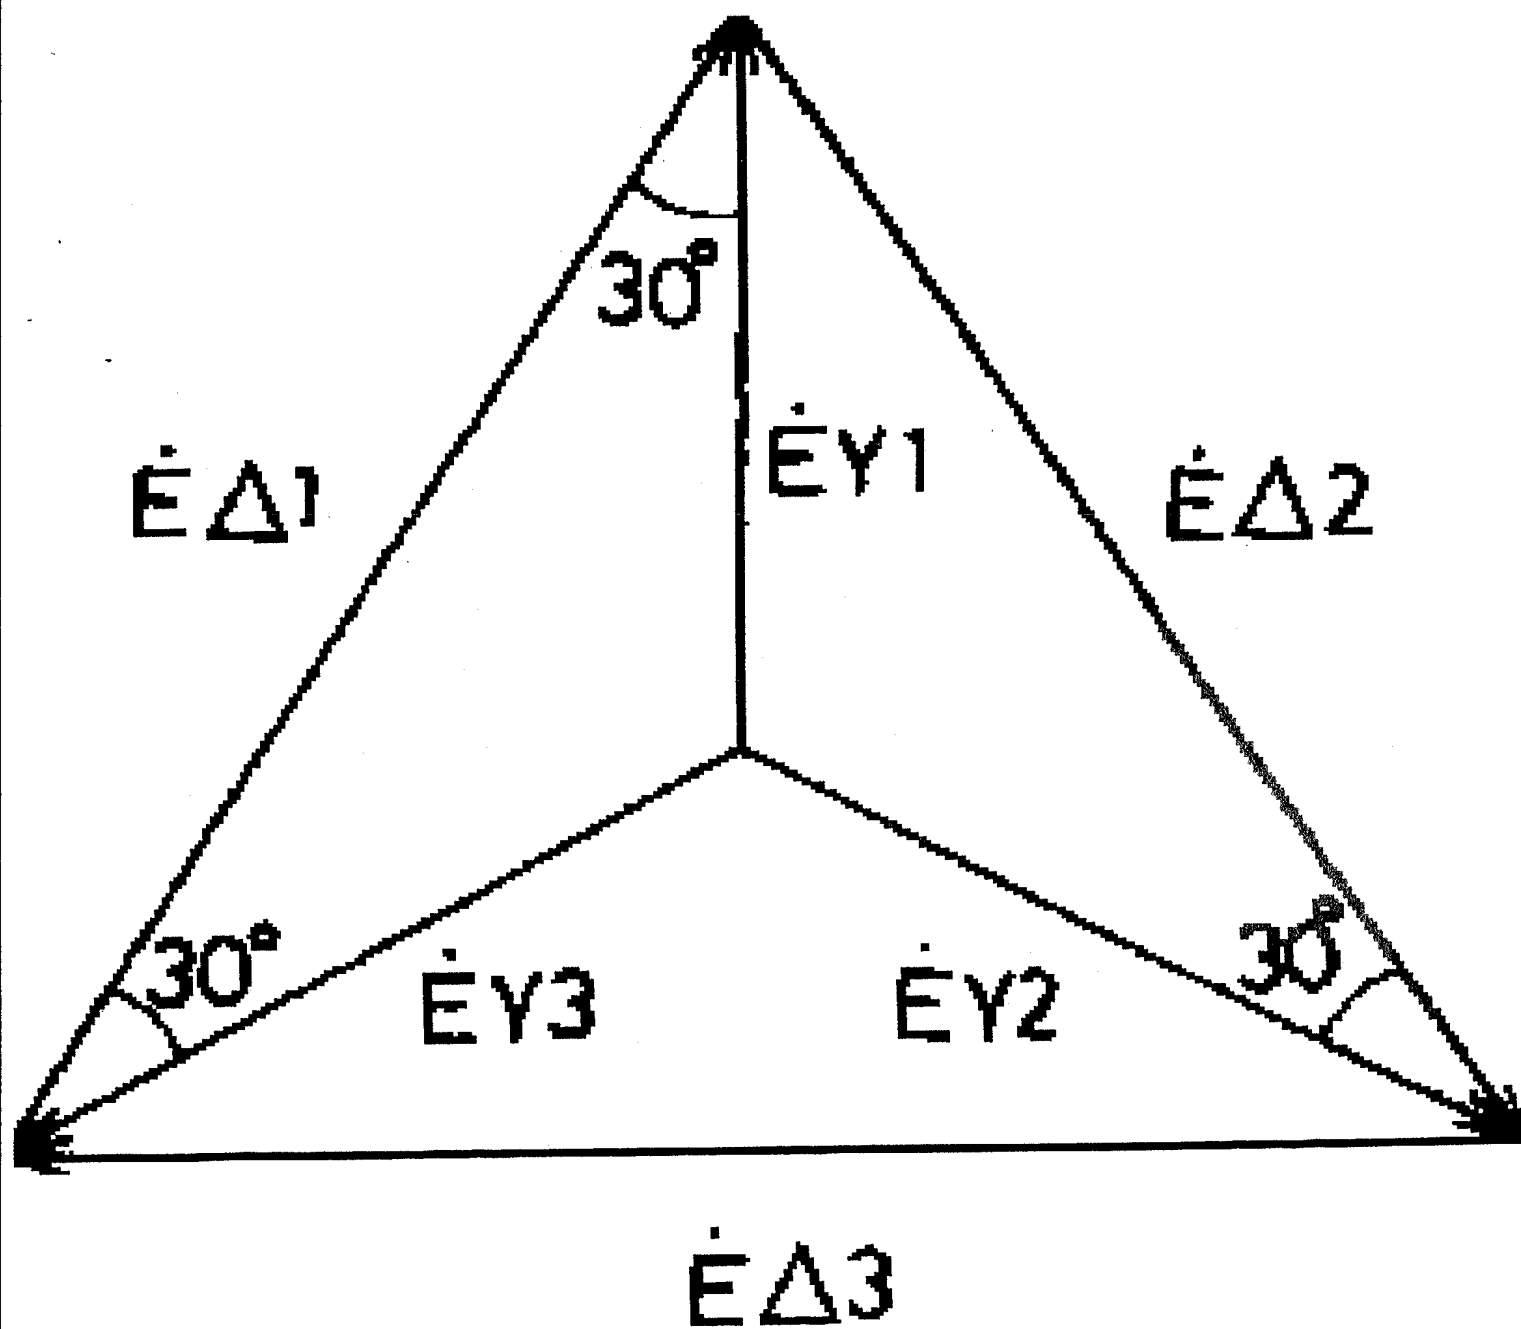

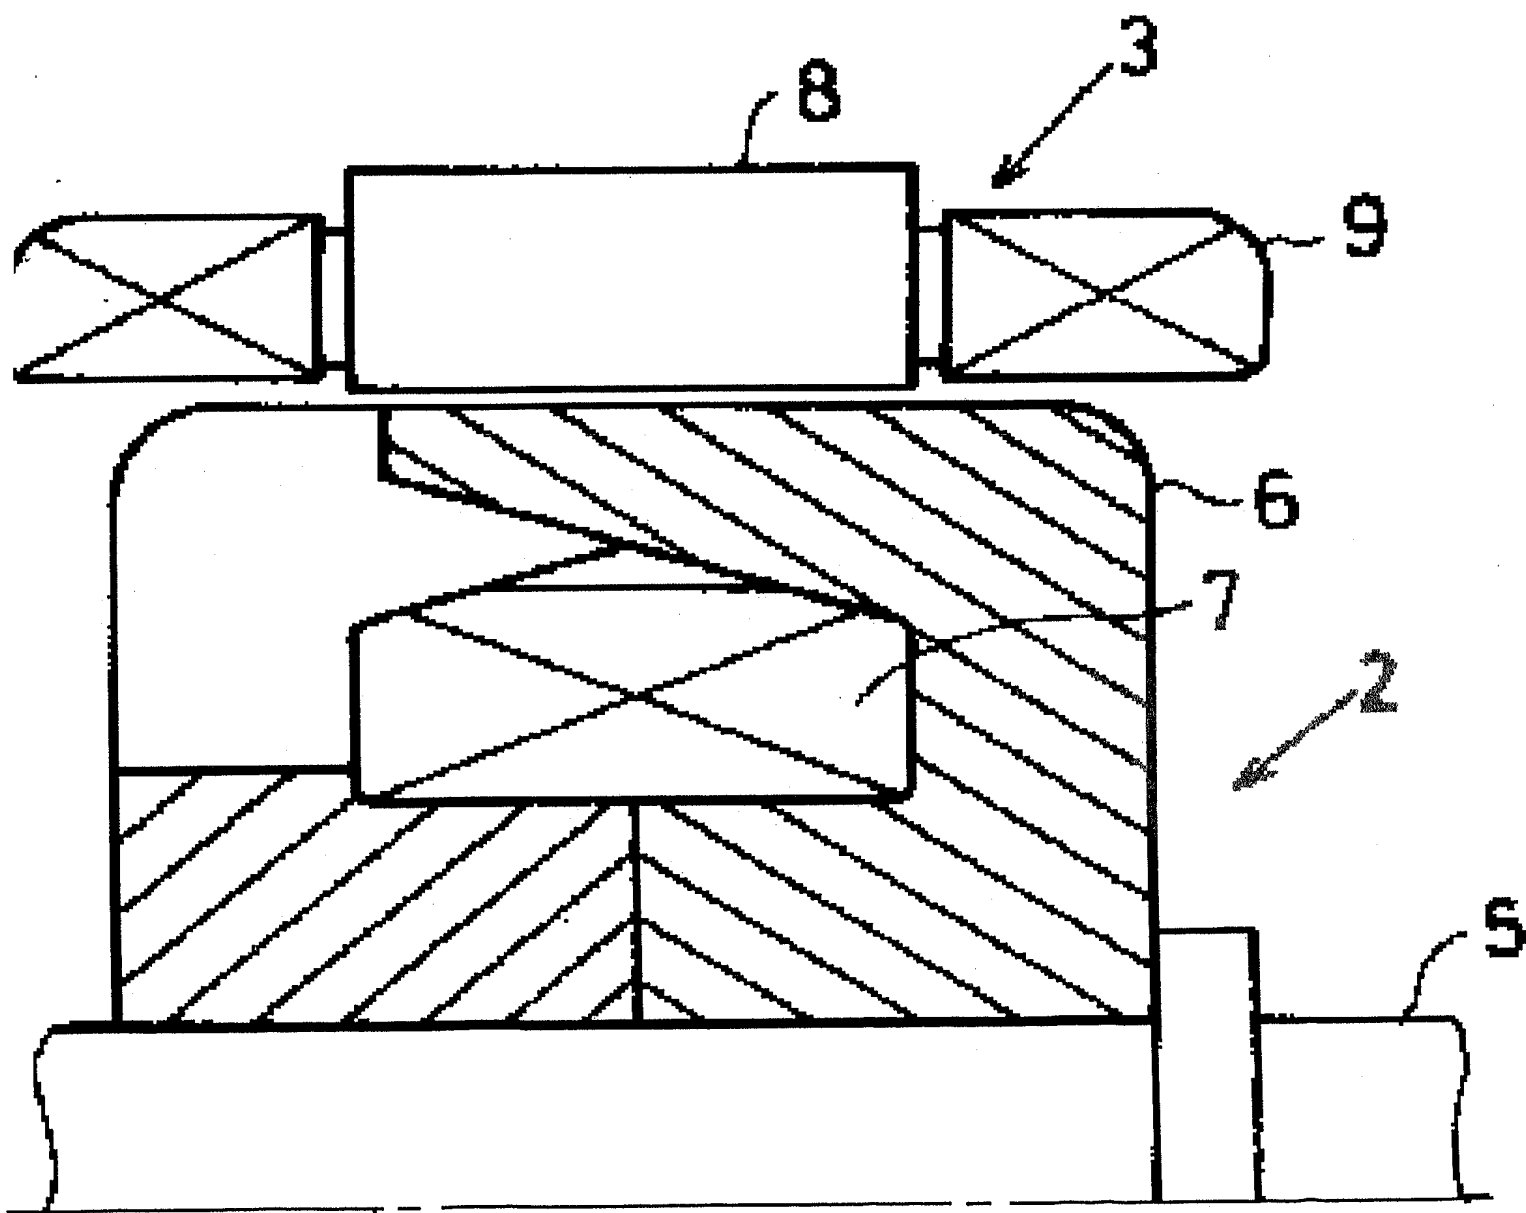

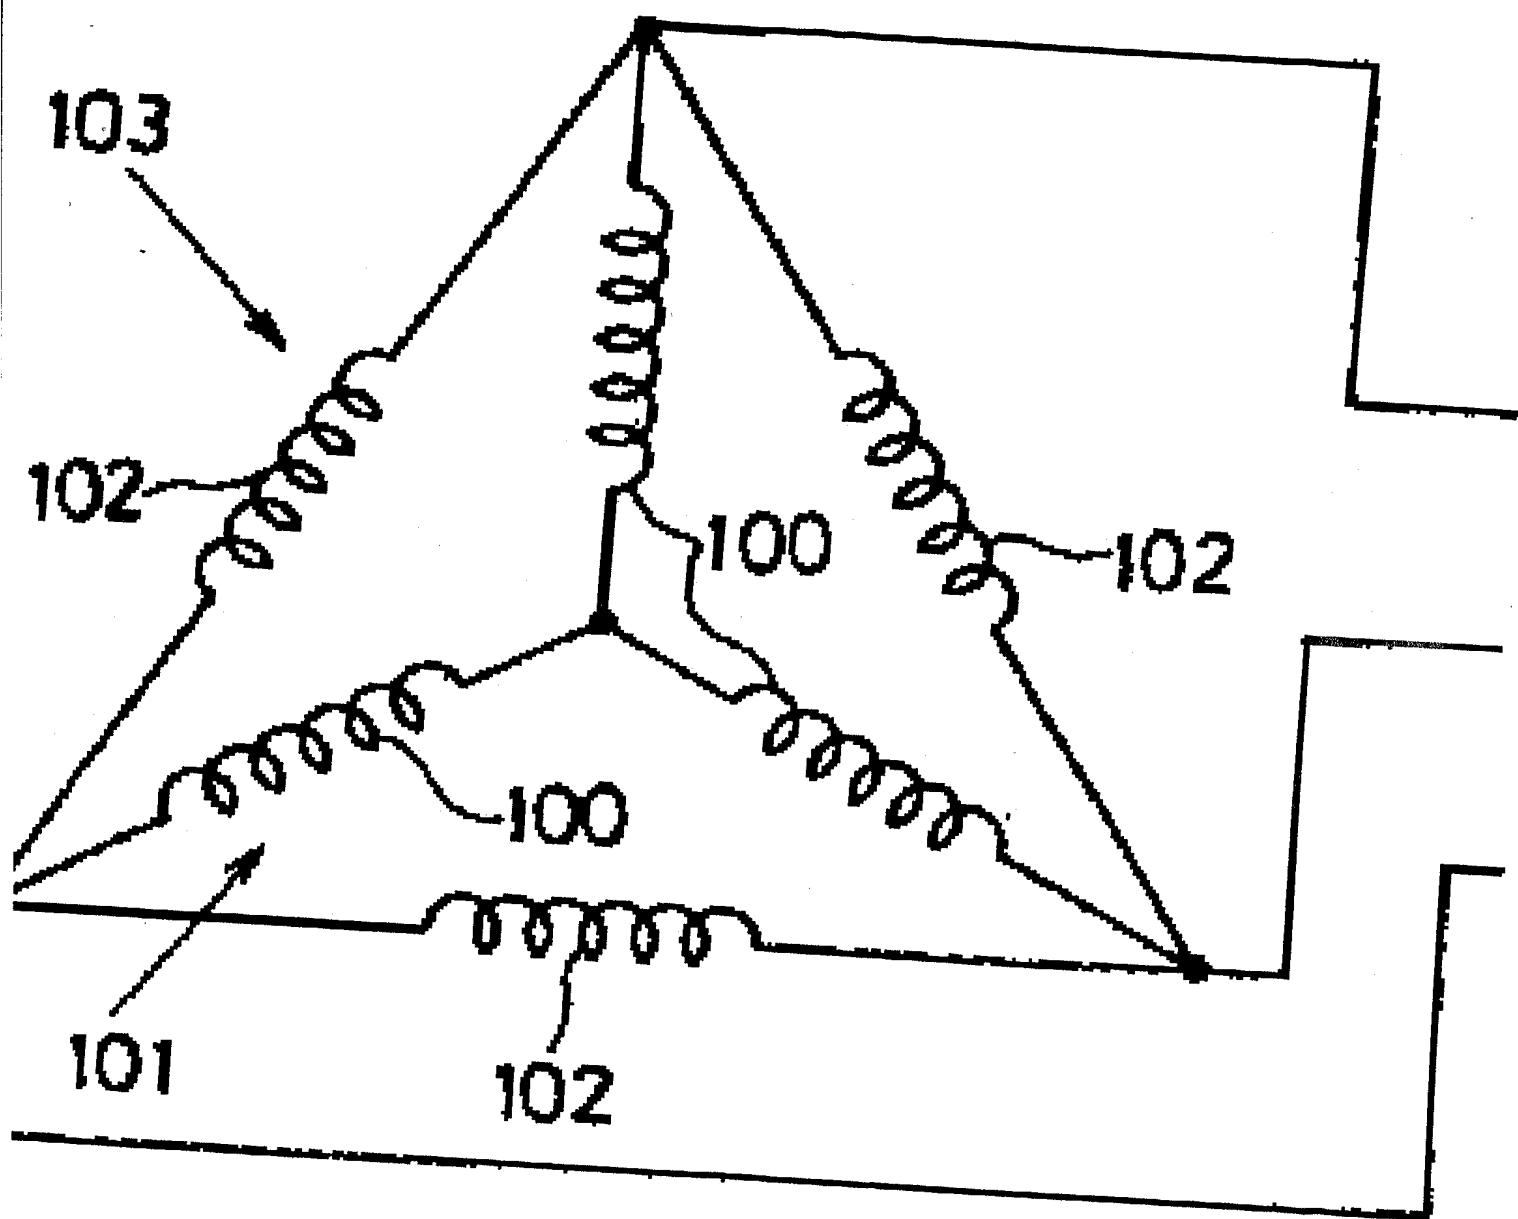

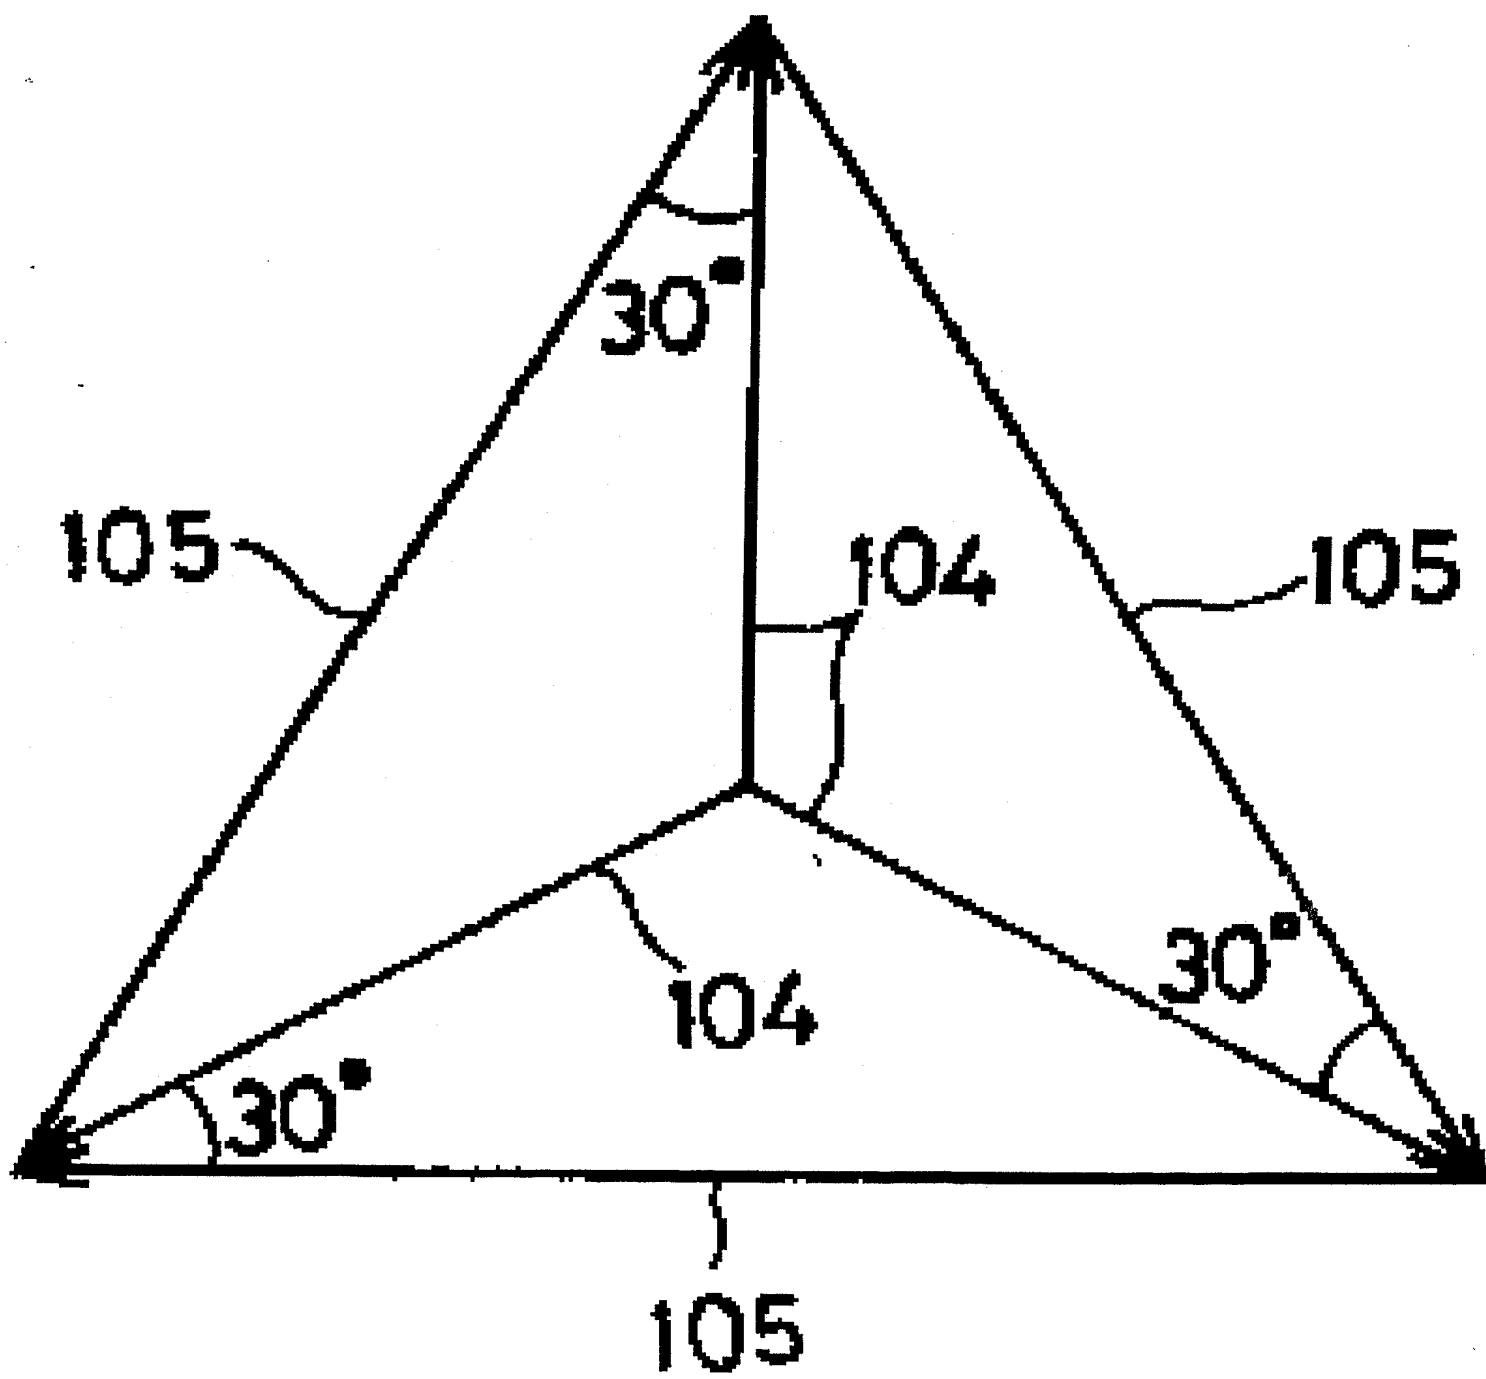

* NOTICES *

Japan Patent Office is not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. **** shows the word which can not be translated.
3. In the drawings, any words are not translated.

CLAIMS

- [Claim]
- [Claim 1] Connection of the 1st coil circuit which carried out connection of the 1st three coil to Y form or delta form, and the 2nd three coil is carried out to Y form or delta form. Rotation electrical machinery characterized by having had the 2nd coil circuit linked to the aforementioned 1st coil circuit and the parallel, having wound the aforementioned 1st coil circuit by the full pitch winding to the stator core which sets the number of slots of ***** to 1, and a coil side spacing winding the aforementioned 2nd coil circuit by the short pitch winding of electrical angles $2\pi/3$.
- [Claim 2] The aforementioned 1st coil circuit and the aforementioned 2nd coil circuit are the rotation electrical machinery of the claim 1 publication characterized by carrying out connection so that the vector diagram synthesis summit of each 1st aforementioned coil and each 2nd aforementioned coil may be in agreement.
- [Claim 3] Rotation electrical machinery of the claim 1 publication characterized by having carried out connection of the aforementioned 1st coil circuit to Y form, and carrying out connection of the aforementioned 2nd coil circuit to delta form.
-

[Translation done.]